

## **LINEAR BRUSHLESS SERVO AMPLIFIERS SMA6110 STAND ALONE MODEL NUMBERING**

This section explains the model numbering system for Glentek's SMA6110 Series High Performance Linear Brushless Servo Amplifiers. The model numbering system is designed so that you, our customer, will be able to quickly and accurately create the model number for the amplifier that best suits your needs.

In order to accurately select a complete part number, please follow the steps shown below:

- 1) Select the industry standard mounting configuration which meets your needs (i.e. Module, Stand Alone or Multi-Axis).
- 2) Utilize the model number key in conjunction with the tables at the beginning of each section to select the complete model number for your requirements. Note: A complete model number example follows the model number key and includes a full description of the individual codes which make up the complete model number.

### **LOGIC INPUT CONFIGURATION DESCRIPTION:**

There are four logic inputs: Limit+, Limit-, Inhibit and Reset In. They may be configured for active-high or active-low signals and pull-up or pull-down termination (type A, B, C and D). All logic inputs have selectable 0 to +5VDC or 0 to +15VDC range. Following is a description of the various types (A, B, C and D) and how they apply to the inhibit input:

Type "A": Requires grounding of input to disable the amplifier (pull-up, active-low).

Type "B": Requires a positive voltage at input to disable the amplifier (pull-down, active-high).

Type "C": Requires grounding of input to enable the amplifier (pull-up, active-high).

Type "D": Requires a positive voltage at input to enable the amplifier (pull-down, active-low).

**Glentek, Inc.**

**208 Standard Street • El Segundo, California 90245 USA  
(310) 322-3026 • (310) 322-7709 Fax • [www.glentek.com](http://www.glentek.com)**

# LINEAR BRUSHLESS SERVO AMPLIFIERS SMA6110 STAND ALONE MODEL NUMBERING

## *SMA6110 Amplifier Model Numbering*

The following tables are used to fill in the different parts of the model number. Refer to these when constructing a model number for your requirements.

XXX	<i>Bus Voltage (VDC)</i>	<i>Ic * (Amps Continuous)</i>	<i>Ip (Amps Peak)</i>
000	+/- 24-70	10	25

\* **Note:** Output power is rated 460 Watts/phase @ 25°C heat sink temperature.

PPP	<i>Description</i>
000	Standard

MM	<i>Mounting</i>
<i>omit</i>	1-axis Module
1A	1-axis Stand Alone
2A	2-axis Chassis
4A	4-axis Chassis

N	<i>Number of amplifiers installed</i>
1	One amplifier installed
2	Two amplifiers installed
3	Three amplifiers installed
4	Four amplifiers installed

ZZ	<i>Power Supply Configuration</i>
<i>omit</i>	Amplifier module
00	17 VAC to 50 VAC
01	
02	

# LINEAR BRUSHLESS SERVO AMPLIFIERS SMA6110 STAND ALONE MODEL NUMBERING


## YYY - Amplifier Configuration Code

<b>+/- Limit</b> 0=L, 1=H
<b>+/- Limit</b> 0=U, 1=D
<b>Inhibit</b> 0=L, 1=H
<b>Inhibit</b> 0=U, 1=D
<b>Reset</b> 0=L, 1=H
<b>Reset</b> 0=U, 1=D
<b>On Board Power Supply,</b> <b>+15V/+5V on pull-up:</b>
0 = +15V; (Default)
1 = +5V.
<b>Motor Temperature:</b>
0 = Type A; (Default)
1 = Type C.

<b>Type A: U=0 &amp; L=0 (Default)</b>
Type B: D=1 & H=1
Type C: U=0 & H=1
Type D: D=1 & L=0

<b>Differential or Single-ended Signal Inputs:</b>
0 = Single-ended; (Default)
1 = Differential.
<b>Velocity or Current Mode</b>
0 = Velocity;
1 = Current; (Default)
<b>Sensor Select:</b>
0 = Off = 120°/240°; (Default)
1 = On = 60°/300°.
<b>Motor Reverse:</b>
0 = Off; (Default)
1 = On.

4-BIT Binary to Hex Conversion Table	
0000=0	1000=8
0001=1	1001=9
0010=2	1010=A
0011=3	1011=B
0100=4	1100=C
0101=5	1101=D
0110=6	1110=E
0111=7	1111=F

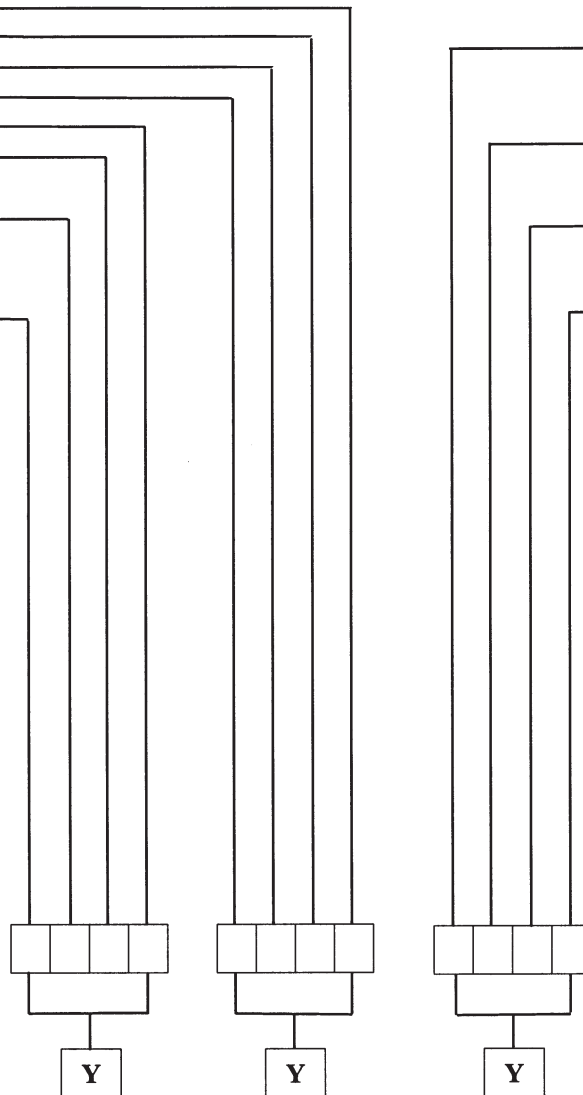

Glentek, Inc.

208 Standard Street • El Segundo, California 90245 USA  
(310) 322-3026 • (310) 322-7709 Fax • [www.glentek.com](http://www.glentek.com)

# LINEAR BRUSHLESS SERVO AMPLIFIERS SMA6110 STAND ALONE MODEL NUMBERING

## *SMA6110 Stand Alone Amplifier*

**SMA6110 - XXX - PPP - YYY - 1A - 1 - ZZ**

Model number key:

**SMA6110** - Designates a Linear Brushless Surface Mount Amplifier w/Trapezoidal Commutation.

**XXX** - Power Board Tab.

**PPP** - Personality Board Tab.

**YYY** - Amplifier Configuration Code.

**1A** - Mounting Configuration Code, 1-axis Stand Alone.

**1** - Number of amplifiers installed, One Amplifier Installed.

**ZZ** - Power Supply Configuration Code.

Example:

SMA6110 - 000 - 000 - 054 - 1A - 1 - 00— 17 VAC to 50 VAC.

One amplifier installed.  
Single axis stand alone amplifier.  
Type A motor temp and reset, +15 VDC logic, C-type inhibit and +/- limits, single ended signal input, current mode, sensor select off and motor reverse off.  
Standard Personality Board Tab.  
+/- 24 to +/- 70 VDC module operation.

Glentek, Inc.

208 Standard Street • El Segundo, California 90245 USA  
(310) 322-3026 • (310) 322-7709 Fax • [www.glentek.com](http://www.glentek.com)